


注释:

- 1.材料: 紫外熔融石英
- 2.入射角: $0\pm5^\circ$
- 3.光洁度: 60-40
- 4.中心波长: 482nm
- 5.最小带宽: 25nm
- 6.透过带: $T_{avg}>93\%$ 469.5-494.5nm
- 7.截止带1: $OD_{avg}>4@200-400nm$
- 8.截止带2: $OD_{avg}>4@400-438nm$
- 9.截止带3: $OD_{avg}>10@438-458nm$
- 10.截止带4: $OD>3.5@463.8nm$
- 11.截止带5: $OD>3.5@501nm$
- 12.截止带6: $OD_{avg}>5@506.4-925nm$
- 13.截止带7: $OD_{avg}>2@925-1100nm$
- 14.截止带8: $OD_{avg}>1@1050-1100nm$

最小有效孔径 $\varnothing 10.00$

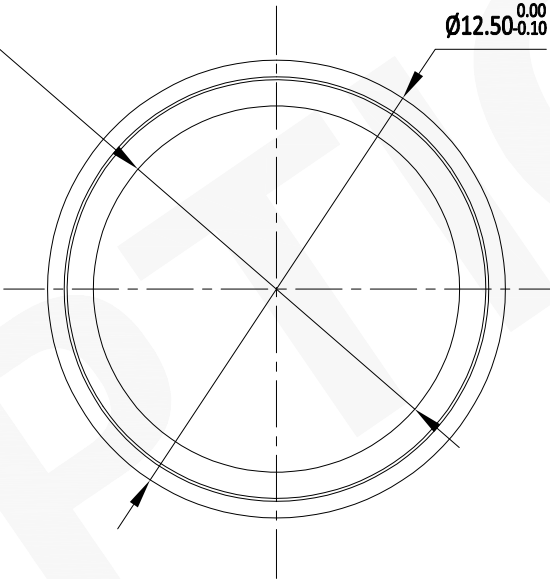

$\varnothing 12.50^{+0.00}_{-0.10}$

3.5 ± 0.10

注:

- 1: 仅供参考, 禁止使用本图加工生产.
- 2: 图纸细节如有更改不再另行通知.



联合光科技（北京）有限公司

名称

荧光带通滤光片-已封装
D=12.50mm

产品编号

199495

单位

mm

